



SECTION B-B
Scale: $\frac{3}{8}'' = 1'-0''$

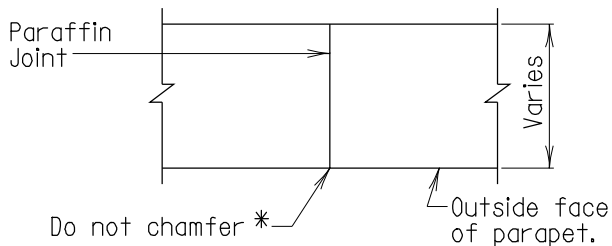

SECTION A-A
Scale: None

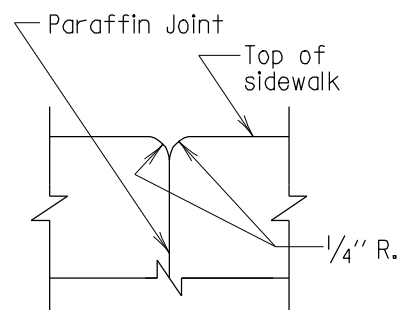

SECTION C-C
Scale: Full

*In order to insure a smooth and acceptable surface, 420.03.11 (Construction Joints) will be strictly adhered to.

Notes:

1. Place vertical paraffin joint, shown hatched, at centerline of pier on multi span bridges.
2. Joints shall be formed by placing alternate sections.
3. The placement of adjacent sections shall have a 40 hour delay between placements.
4. Railing and fencing not shown.

FHWA APPROVAL
DATE:

APPROVAL	
<i>L. S. Friedman</i>	DIRECTOR
OFFICE OF BRIDGE DEVELOPMENT	
DATE: 6/11/05	
REVISIONS	
SHA	FHWA

STATE OF MARYLAND
DEPARTMENT OF TRANSPORTATION
STATE HIGHWAY ADMINISTRATION
OFFICE OF BRIDGE DEVELOPMENT

PARAPET CONTROL JOINT AND SINGLE CONDUIT
PLACEMENT WITH 42" F-SHAPE PARAPET

STANDARD NO. BR-SS(6.09)-05-70B

SHEET 3 OF 3